



D.O.O.
BETONJERKA
Č A Č A K



DOO BETONJERKA Čačak, Nikole Tesle br. 5
E-mail: office@betonjerkacacak.rs, Web: www.betonjerkacacak.rs

DOO BETONJERKA Čačak je preduzeće za proizvodnju armiranih i nearmiranih betonskih vibropresovanih cevi, betonskih elemenata za šahte i betonske galanterije.

PROIZVODNI PROGRAM

ARMIRANOBETONSKE CEVI ZA KANALIZACIJU



ARMIRANOBETONSKE ŠAHTE



BETONSKA GALANTERIJA



ARMIRANOBETONSKE MONTAŽNE HALE



MONTAŽNI RAMOVSKI PROPUSTI



ARMIRANO BETONSKA ODBOJNA OGRADA „NEW JERSEY“



ARMIRANOBETONSKI ELEMENTI ZA POLJOPRIVREDU



BETONSKI PREFABRIKATI



Cert.No.24751
ISO 9001
ISO 14001
ISO 45001

ARMIRANOBETONSKE CEVI





CEVI SA FALCOM

VIBROPRESOVANE CEVI

Čist otvor D (mm)	Deblj. Zida d (mm)	Dužina L (mm)	Otpornost na temeni pritisak (kN/m)	Težina kg/m
1400	150	2000	80,0	1850
1600	170	2000	81,0	2360
1800	190	1500	83,0	2970


VIBRIRANE CEVI

Čist otvor D (mm)	Deblj. Zida d (mm)	Dužina L (mm)	Otpornost na temeni pritisak (kN/m)	Težina kg/m
1200	130	1500	79,0	1360
1400	150	1500	80,0	1780
1600	165	1000	81,0	2380
2000	210	1500	85,0	3630
2200	230	1500	85,0	4380
2400	250	1500	85,0	5200

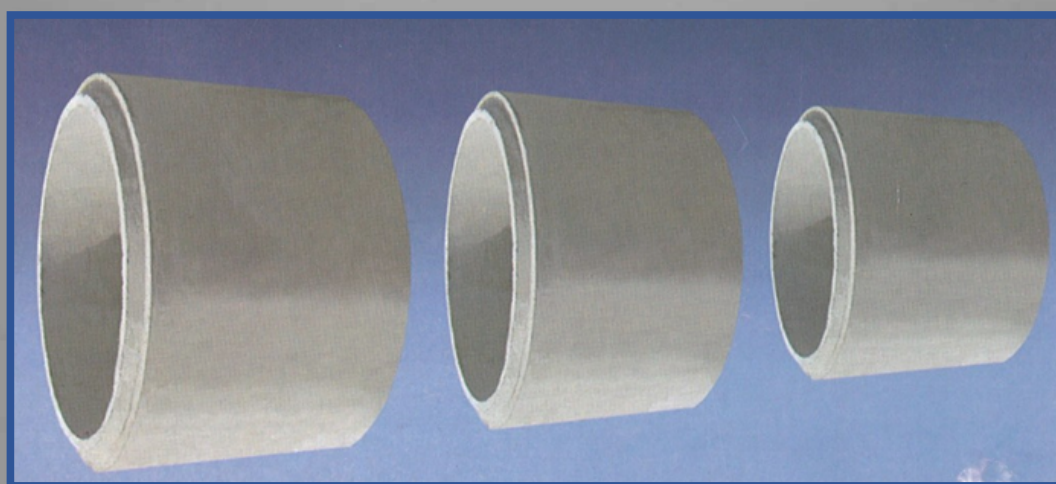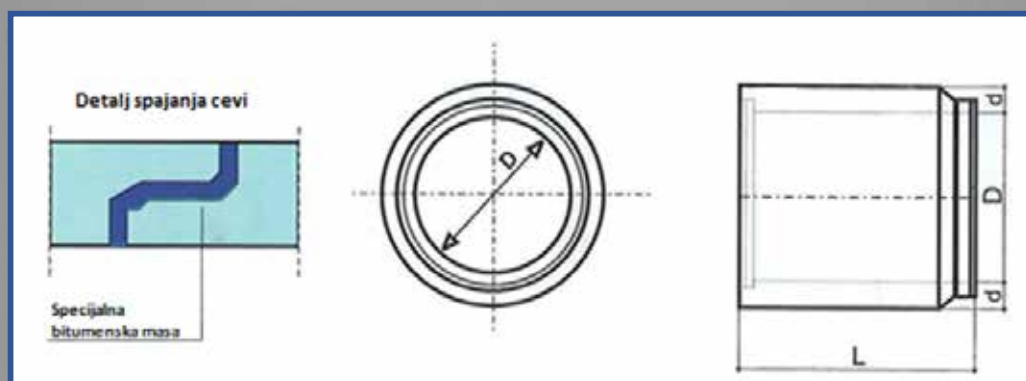

CEVI SA MUFOM

Čist otvor D (mm)	Deblj. Zida d (mm)	Dužina L (mm)	Otpornost na temeni pritisak (kN/m)	Težina kg/m
400	55	2500	32,0	210
500	60	2500	35,0	280
600	70	2500	38,0	360
800	85	2500	43,0	640
1000	110	2500	63,0	1050
1200	130	2000	79,0	1480


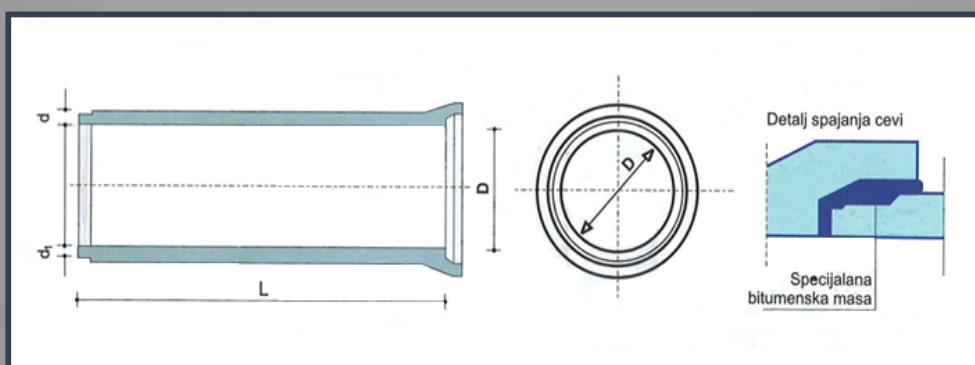


BETONSKI ELEMENTI ZA ŠAHTE






ZAVRŠNI PRSTEN



KARAKTERISTIKE ZAVRŠNOG PRSTENA					
D	D1	d	h	kg	
1000	625	120	600	675	



PLOČA




Namenjena je za ugradnju livenog poklopca šahte.

KARAKTERISTIKE PLOČE					
D	h	d1	d2	d3	kg
625	100	150	132,5	55	412





PRSTEN



KARAKTERISTIKE PRSTENA					
Red. br.	D	D1	d	h	kg
1	1000	1240	120	250	265
2	1000	1240	120	500	525
3	1000	1240	120	1000	1050




KINETA

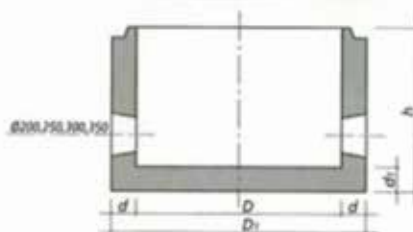

Podna ploča za nearmirane i armirane kinete armira se sa: Ø12/10 cm u oba pravca.

KARAKTERISTIKE KINETE						
Red. br.	D	D1	d	d1	h	kg
1	1000	1240	120	120	750	1025
2	1000	1240	120	120	1000	1275

BETONSKI ŠAHT

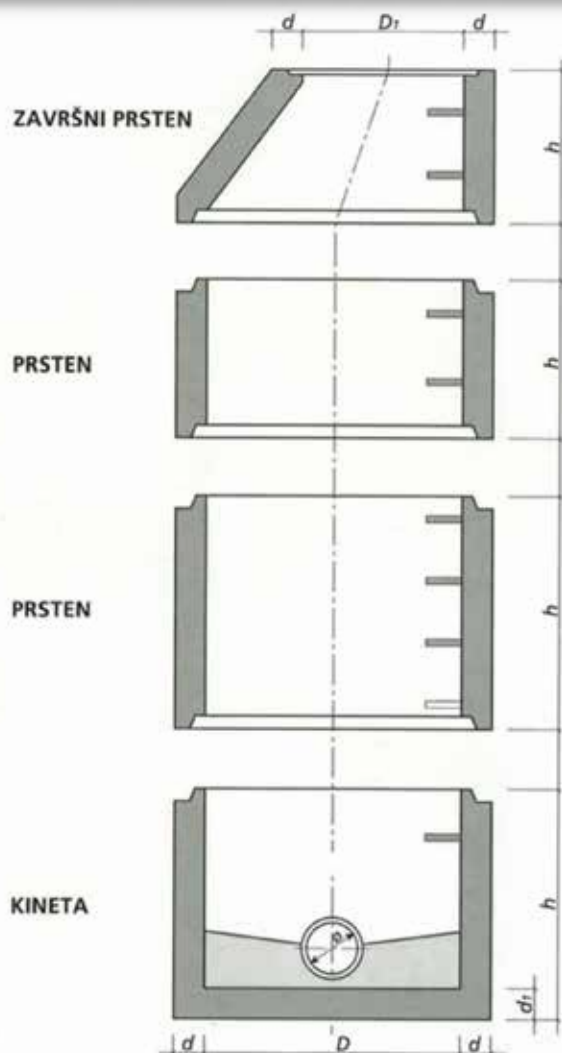

PENJALICA






A	B	C
80	120	330



Betonski elementi za šahtove proizvode se na mašini „VIBROMATIC“ od vodonepropustljivog betona MB40. U zavisnosti od zahtevanog opterećenja mogu se raditi *armirani* i *nearmirani*. Spajanje elemenata može se vršiti gumenim dihtunzima ili specijalno bitumenskom masom. Upotrebljavaju se za sve vrste šahtova i bunara.

BETONSKA GALANTERIJA




ARMIRANOBETONSKA ODBOJNA OGRADA



Armiranobetonska odbojna ograda (barijera) se proizvodi u metalnoj oplati od betona MB40. Elementi su međusobno povezani zglobnom vezom, zbog mogućnosti postavljanja u krivinama.

Elementi se postavljaju na autoputevima, magistralnim putevima i kao odbojna ograda na mostovima. Mogu se upotrebiti za zaštitu kosina na putevima i u obezbeđenju opasnih strmina pored puta. U ponudi imamo dva tipa „New Jersey“ odbojne ograde dužine 1.80m, 2.80m, 4.00m i 6.00m.

TIP 1

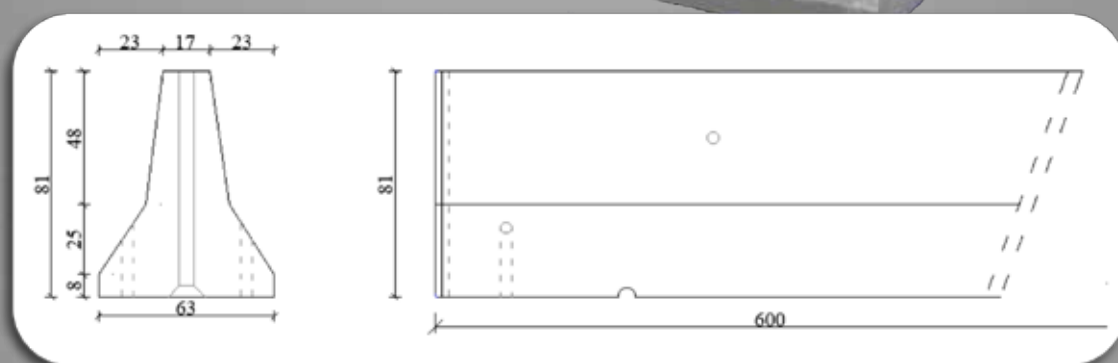


TIP 2

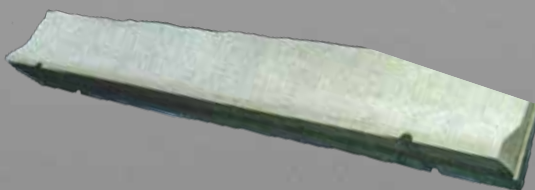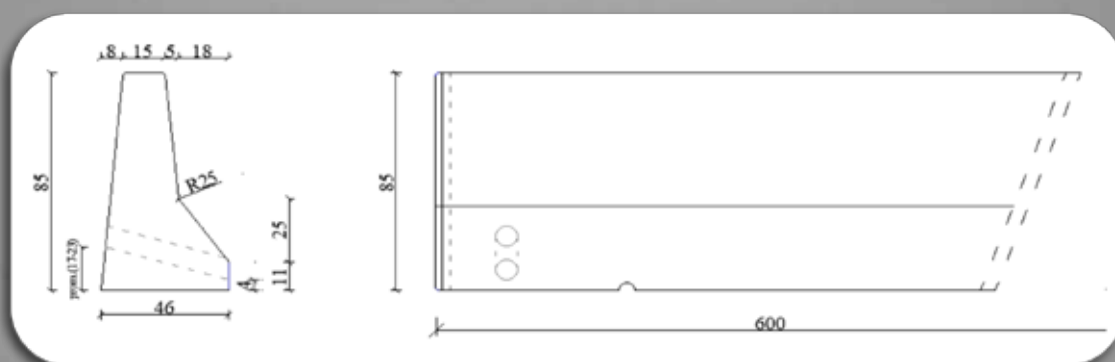


ARMIRANOBETONSKE MONTAŽNE OGRADE

Betonske ograde se proizvode od betona MB30 u metalnim kalupima standardnih dimenzija. Ograde se mogu kompletirati od raznih ogradnih elemenata: stubova, talpi, tranzena i poklopnih ploča (venaca), elemenata od pocinkovane žice i drugih, prema želji naručioca.


Karakteristike

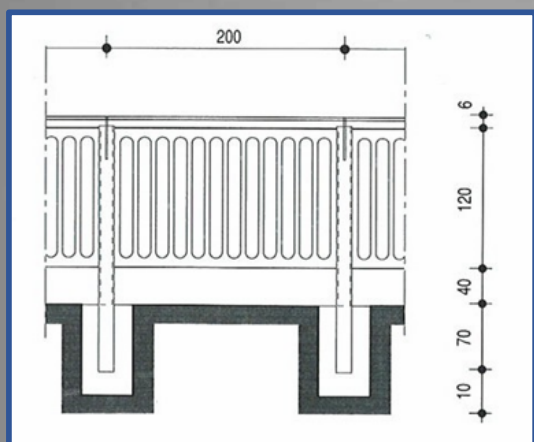

Poz	Dimenzije			kg	MB
	B (cm)	H (cm)	L (cm)		
1-stub	12	12	270	85	30
2-talpa	5	40	192	96	30
3-venac	12	6	192	32	30

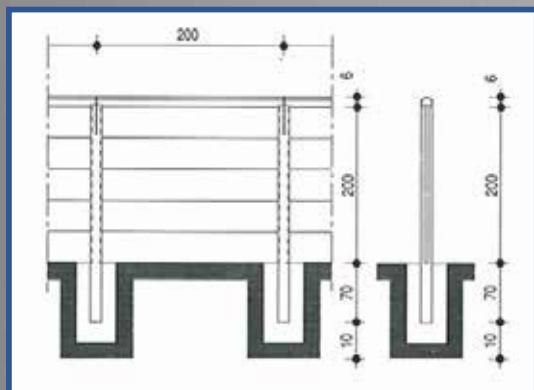


Poz	Dimenzije			kg	MB
	B (cm)	H (cm)	L (cm)		
1-stub	12	12	230	85	30
2-talpa	5	40	192	96	30
3-venac	12	6	192	32	30
4-platno	5	120	192	150	30

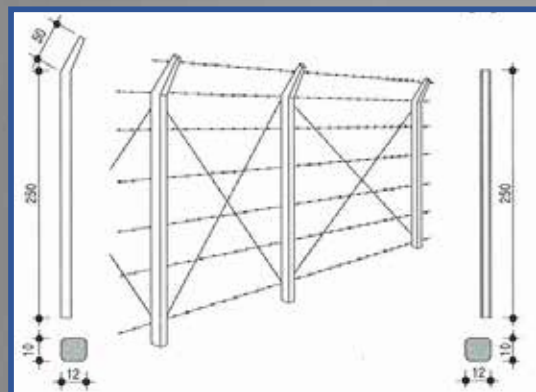


ARMIRANOBETONSKE SIGNALNE KUĆICE

Proizvodi se prema tehničkoj dokumentaciji železnica Srbije. Koriste se kao signalne kućice za železnicu, stražarice, biletamice i dr. sa mogućnošću ugradnje otvora za prozore i vrata.


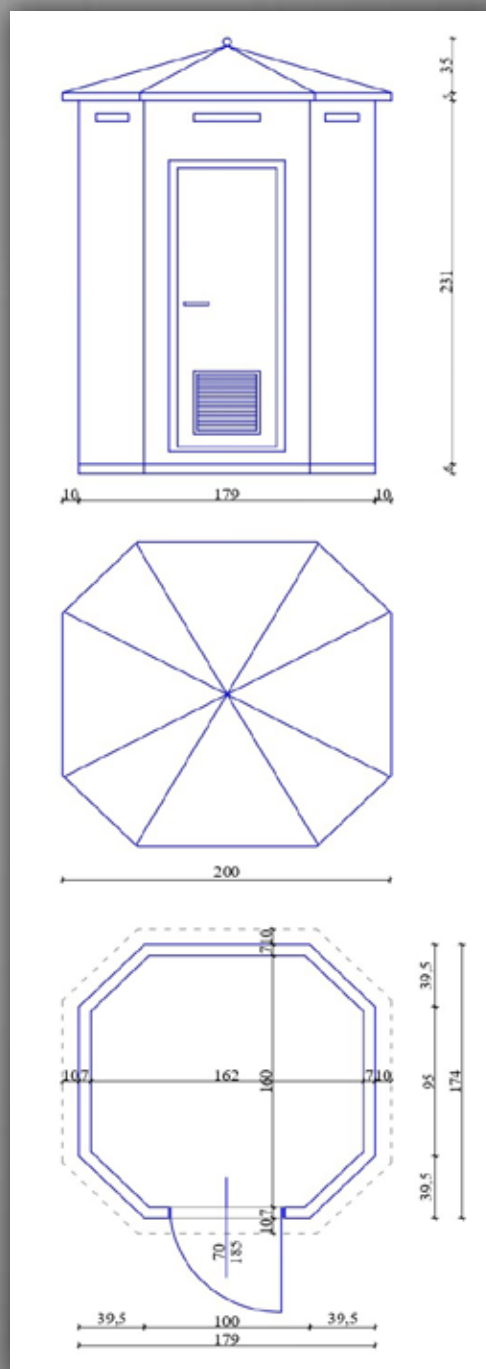


ARMIRANOBETONSKI RAMOVSKI PROPUSTI

Armiranobetonski ramovski propusti proizvode se u metalnoj oplati. Marka betona i armatura su po projektu. Elementi se međusobno spajaju na pero i žljeb, a postoji mogućnost poprečnog utezanj. Moguća je proizvodnja raznih dimenzija prema potrebama naručioca.

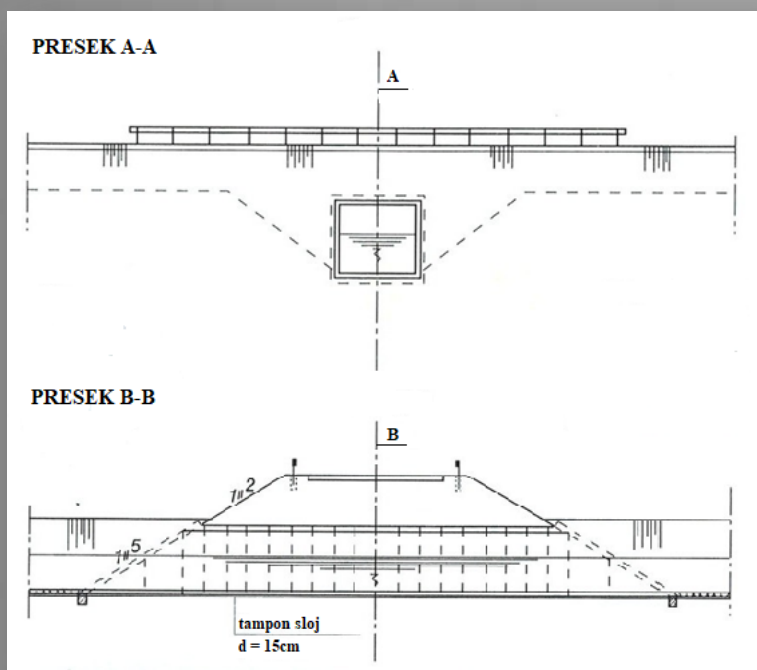

Red. br.	Dimenzije		
	a (cm)	h (cm)	b (cm)
P1	200	200	100+50
P2	250	250	100+50
P3	200	250	100+50

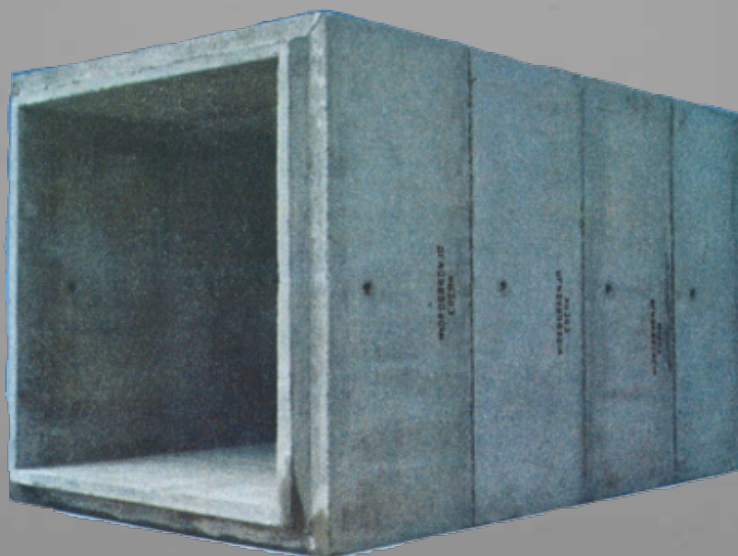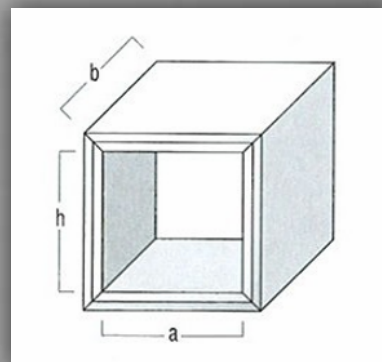


ARMIRANOBETONSKI SLIVNICI

Armiranobetonski slivnici se proizvode od betona MB30 u metalnim kalupima na vibro stolu. Koriste se za odvođenje atmosferske vode sa kolovoza, parkinga, kao i u druge namene. Prema potrebi naručioca, moguća je izrada jednog ili više otvora za ugradnju priključaka.

Karakteristike za slivnike				
D	d	L	kg	MB
450	60	1000	200	30





Karakteristike za postolja					
D	D1	h	h1	kg	MB
450	570	60	50	50	30

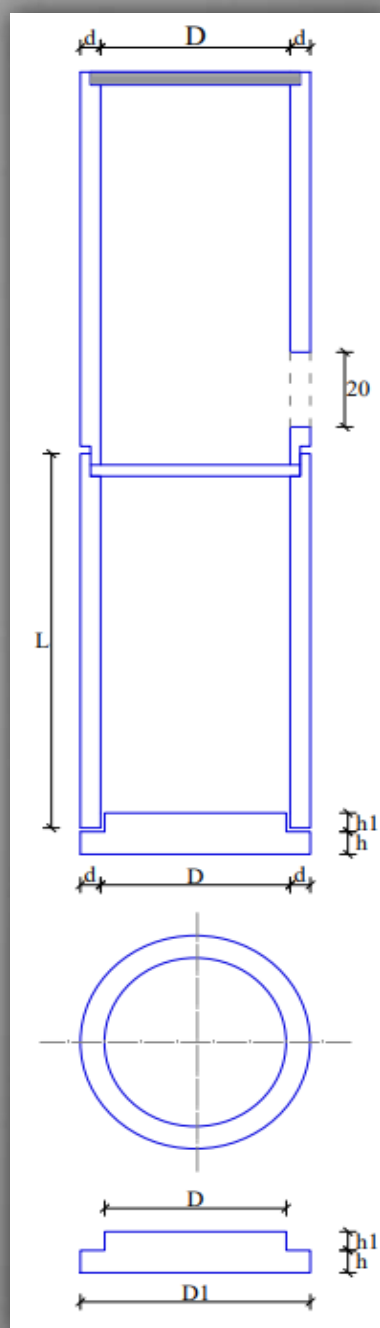

BETONSKE ŽARDINJERE



Betonske žardinjere proizvode se u metalnim kalupima od betona MB30. Površinska obrada može biti u natur betonu, brušena, bojena ili štokovana, prema zahtevu naručioca.

Koriste se za uređenje javnih površina.

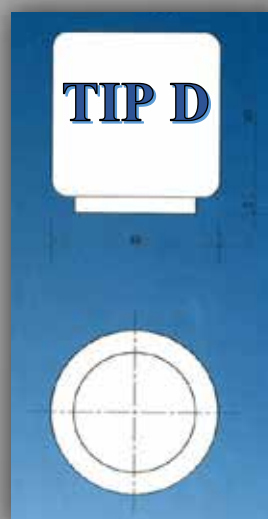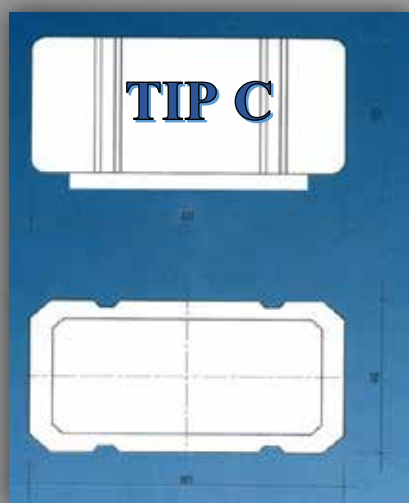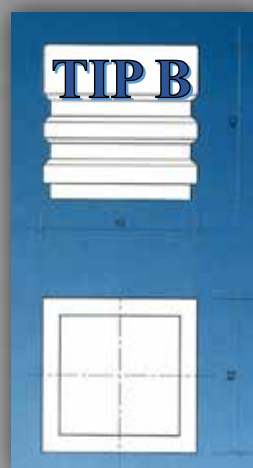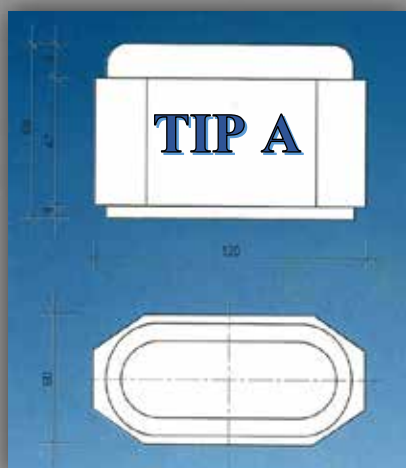



BETONSKE RIGOLE

Betonske rigole proizvode se od betona MB30 vibriranjem u metalnim kalupima. Mogu biti bele i sive, a težina elementa po komadu je 45 kg.

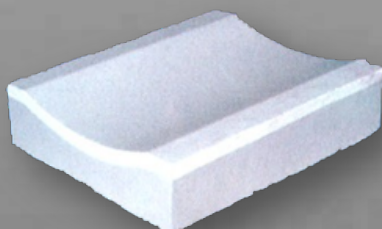

BETONSKE KANALETE

Betonske kanalete s eproizvode od betona MB30 vibriranjem u metalnim kalupima. Mogu se upotrebljavati za ograde, žardinjere, klupe, oblaganje kanala i dr., a težina elementa po komadu je 100





BETONSKE STAJSKJE REŠETKE

Betonske stajske rešetke jednostruke i duple proizvode se od betona MB40 u metalnim kalupima.

Koriste se za podove u stajama.


JEDNOSTRUKJE STAJSKJE REŠETKE

TIP	Dužina L (cm)	h (cm)	b ₀ (cm)	t (cm)	b (cm)	p (cm)	MB	Težina po kom (kg)
R 20	200	14	15,5	6	12	3,5	40	68
R 22	220	14	15,5	6	12	3,5	40	74
R 24	240	14	15,5	6	12	3,5	40	81
R 26	260	16	15,5	6	12	3,5	40	99
R 28	280	16	15,5	6	12	3,5	40	106

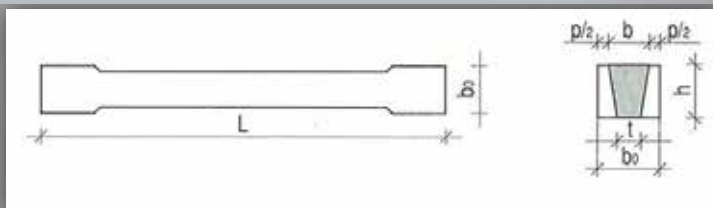



DUPLE STAJSKJE REŠETKE

TIP	Dužina L (cm)	h (cm)	b ₀ (cm)	t (cm)	b (cm)	p (cm)	MB	Težina po kom (kg)
R 30	300	14,5	31,2	7	12	3,6	40	220

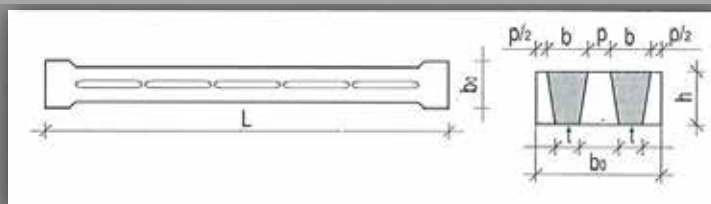


BETONSKE JASLE

Betonske jaslje proizvode se od betona MB40 u metalnim kalupima. Koriste se kao hranilice u stočarskim farmama i stajama. Dužina elementa je 2,0m, a težina elementa po komadu 464 kg.

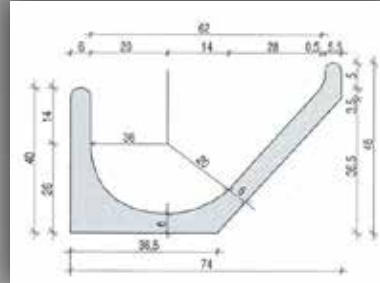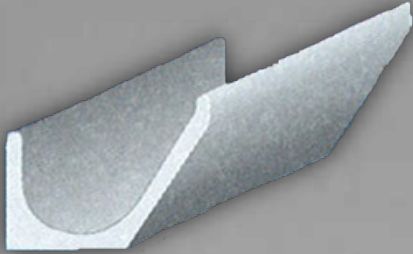

VANSTANDARDNI PROIZVODI

U proizvodnom programu našeg preduzeća nudimo i proizvode prema posebnim zahtevima naručioca. Vanstandardnim proizvodima obuhvaćeni su sledeći proizvodi: livenobetonske kinete sa otvorima prema zahtevu, betonske ploče sa i bez otvora, AB propusti i žardinjere većih gabarita, AB temeljne stope, AB trapezni i „L“ elementi za formiranje zidova i barijera, AB elementi za formiranje kanala i drugi proizvodi prema zahtevima naručioca.

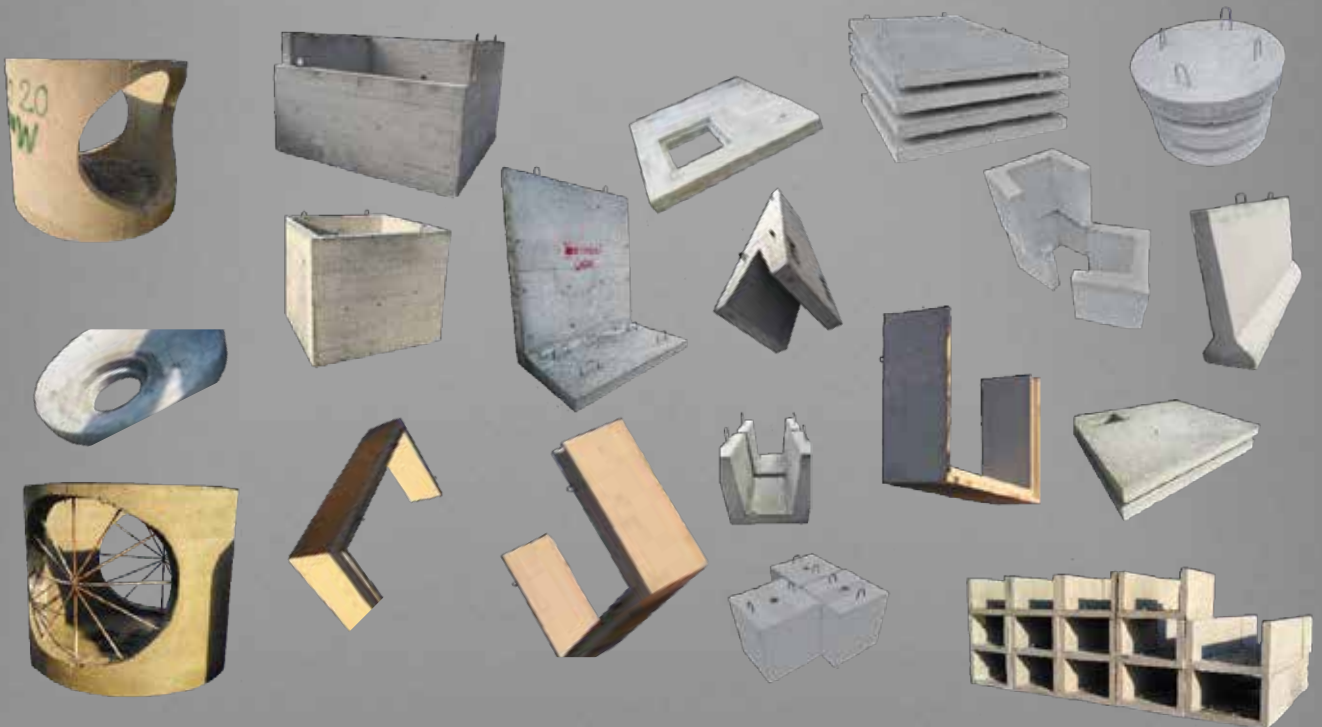



DOO BETONJERKA ČAČAK

Nikole Tesle br. 5, 32000 Čačak, Srbija

Tel.: 032/53-44-455

032/53-73-689

E-mail: office@betonjerkacacak.rs

Web: www.betonjerkacacak.rs